

Aera

Aera[®] FC-R7700 Series

Mass Flow Controller

Economical, analog control, elastomer-sealed model



Aera

Benefits

- ▶ Fast response— ≤ 2 sec flow-settling time
- ▶ Easy integration—standard connectors and dimensions

Features

- ▶ Elastomer seals
- ▶ VCR® and Swagelok® compatible connections
- ▶ Full-scale flow ranges from 10 SCCM to 200 SLM
- ▶ Normally-closed or normally-open solenoid control valve
- ▶ Leak integrity of 1×10^{-6} atm-cc/sec of He



As the field-proven standard for a range of applications, Hitachi Metal's Aera® FC-R7700 Series delivers Economical, analog control, elastomer-sealed model.

For process and equipment engineers working in the semiconductor, flat panel display, data storage, industrial vacuum, and industrial coating markets, this series provides high reliability and superior performance for non-corrosive gas applications, including CVD, PVD, etch, ion implantation, sputtering, thermal oxidation, optical glass coating, optical fiber, surface treatment, and other coating processes.

This unit is compliant for EU-Rohs Directive.

Low Cost

Custom-made for applications that require top performance but not the corrosion resistance or high leak integrity of metal seals, the FC-R7700 Series is cost-effective, low noise and low power consumption.

Easy Integration

This models feature standard electrical connectors and critical dimensions to easily fit in the existing systems with lower noise and lower power consumption than the case of digital model.

Fast Response

Advances in the FC-R7700 Series' technical design delivery enhanced performance compared to competing mass flow controller (MFC). These advances include a highly sensitive, rapid-response, small-diameter sensor. With normally-open and normally closed solenoid designs, the FC-R7700 Series provides a flexibility for many applicable needs and produce a settling time of ≤ 2 sec. between set points. (≤ 3 sec. for FC-R7720CD/FC-R7720D)

Unsurpassed Reliability

The usage of less number of the electric devices than the case of digital model and no usage of the DC-DC converter results the highly- reliable performance in a long-term.

Aera[®] FC-R7700 Series

Specifications

Operational	FC-R7700CD/FC-R7700D Series	FC-R7710CD/FC-R7710D Series	FC-R7720CD/FC-R7720D Series
Full-Scale Range	10 SCCM to 5 SLM	N/O: 6 to 20 SLM* N/C: 6 to 50 SLM**	35 to 200 SLM
Response Time	≤ 2 sec. to within ±2% of full scale 0→100%, SEMI E17-91		≤ 3 sec. to within ±2% of full scale 0→100%, SEMI E17-91
Flow Accuracy with calibration gas @22°C ±3°C, Zero <±0.1% FS	≤ ±1% of full scale	≤ ±2% of full scale	
Linearity	≤ ± 0.5% of full scale	≤ ± 0.5% of full scale ^{※1}	≤ ±1% of full scale
Repeatability	≤ ± 0.2% of full scale		
Leak Integrity	1x10 ⁻⁶ atm-cc/sec (He) max; 1x10 ⁻⁷ Pa·m ³ /sec (He) max		
Flow Control Range	2 to 100% of full scale ^{※2}		
Normal operating Pressure	49 to 275kPaD	69 to 275kPaD* 69 to 275kPaD**	145 to 275kPaD ^{※3}
Maximum Operating Pressure	490kPaG		
Proof Pressure	1MPaG		
Operating Temperature Range	5 to 45°C (41 to 113°F) Gas temperature needs to be the same as the atmospheric temperature.		

* N/O: Normally Open Valve Model, ** N/C: Normally Closed Valve Model [20SLM < N2 density flow ≤ 50SLM: 147 to 275kPaD]

※1: Less than ±1% for Full Scale Flow greater than 30SLM

※2: 5~100% for Full Scale Flow greater than 150SLM

※3: 195 to 295 psiD for Full Scale Flow greater than 150SLM

These specifications are valid only in the condition we measured in our test bench with standard configuration. The performance in the field may not be compliant with this document.

Physical	FC-R7700CD/FC-R7700D Series	FC-R7710CD/FC-R7710D Series	FC-R7720CD/FC-R7720D Series
Control Valve Type	Normally-open or normally-closed solenoid		
External seals	Fluoroelastomer or Chloroprene Rubber		
Materials	Stainless-steel type 316L, 316, PTFE, Magnetic Stainless, Fluoro Rubber, Chloroprene Rubber*	Stainless-steel type 316(L), PTFE, Magnetic Stainless, Fluoro Rubber, Chloroprene Rubber, PCTFE**	
Standard Fittings	1/4" VCR [®] , 1/4" Swagelok [®] compatible		1/4" VCR [®] , 3/8" VCR [®] , 1/4" Swagelok [®] , 3/8" Swagelok [®]
Orientation	May be mounted in any position		
Mass	1.0 kg (2.2 lb)	2.8kg (6.2lb)	

* Fluoro Rubber or Chloroprene Rubber is used in case that the N2 density flow is 11.096SLM or greater with normally open valve model and the material depends on the applied gas. Contact us to see what material is applied.


Fluoro Rubber or Chloroprene Rubber is used in case that the N2 density flow is 551SCCM or greater with normally closed valve model and the material depends on the applied gas. Contact us to see what material is applied.

** The material depends on the applied gas. Contact us to see whether Fluoro Rubber or out of this material(stainless steel 316, PCTFE) is used.

Electrical	FC-R7700CD/FC-R7700D Series	FC-R7710CD/FC-R7710D Series	FC-R7720CD/FC-R7720D Series
Input Power	+15 VDC ±2%, 25 mA -15 VDC ±2%, 180 mA		+15 VDC ±2%, 25 mA -15 VDC ±2%, 220 mA
Power Consumption	3.1 W max		3.7 W max
Input Command Signal	0 to 5 VDC Input impedance > 1MΩ		
Output signal	0 to 5 VDC Load impedance > 2kΩ		

Electrical Connections

9-Pin D-sub, pin contact connector	
1	VALVE OPEN/CLOSE*
2	OUTPUT(DC 0~5V/0-100%)
3	POWER DC +15V
4	COMMON
5	POWER DC -15V
6	CONTROL (DC 0~5V/0-100%)
7	COMMON
8	COMMON
9	VALVE TEST PT.(DC 0~-13V)

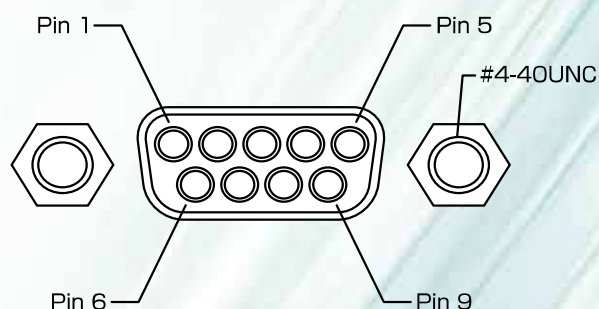


* Connection to +15V OPEN, Connection to -15V : CLOSE (Normally closed valve model)
Connection to +15V CLOSE, Connection to -15V : OPEN (Normally open valve model)

Model and Suffix Codes

Category	Description	Suffix Codes							
Product Type	Mass flow controller	FC-
RoHS Compliance	Compliant with RoHS directives	...	R
Full-Scale Range	10 SCCM to 5 SLM	7700
	6 to 50 SLM	7710
	35 to 200 SLM	7720
Control Valve	Normally-closed	C
	Normally-open	(Blank)
Connector	Aera® 9-Pin D	D
Fittings	1/4" VCR® compatible	4V
	3/8" VCR® compatible (772x series only)	6V
	1/4" Swagelok® compatible	4S
	3/8" Swagelok® compatible (772x series only)	6S
Gas	Type of gas	N ₂	...
Flow	Flow range of gas (SCCM or SLM)	200
Single-Gas Example		FC-	R	7700	C	D	4V	N ₂	200 SCCM
(MFC, RoHS compliant, 9-pin D connector, normally-closed valve, 1/4" VCR® fittings, N2 gas, 200 SCCM full-scale range)									

Dimensions

	FC-R7700CD/ FC-R7700D Series	FC-R7710CD/ FC-R7710D Series	FC-R7720CD/ FC-R7720D Series
A	12.7 mm (0.5")	12.7 mm (0.5")	15.0 mm (0.6")
B	76.0 mm (3.0")	78.5 mm (3.09")	133.5 mm (5.3")
C	124.0 mm (4.9")	124.0 mm (4.9")	1/4" VCR fittings: 184.3 mm (7.2")
			3/8" VCR fittings: 192.5 mm (7.6")
D	18.3 mm (0.72")	18.3 mm (0.72")	25.5 mm (1.0")
E	69.0 mm (2.7")	69.0 mm (2.7")	101.5 mm (4.0")
F	119.0 mm (4.7")	119.0 mm (4.7")	140.5 mm (5.5")
G	125.0 mm (4.92")	125.0 mm (4.92")	144.5 mm (5.7")
H	32.0 mm (1.3")	32.0 mm (1.3")	38 mm (1.5")
I	3.5 mm (0.2")	3.5 mm (0.14")	16 mm (0.63")

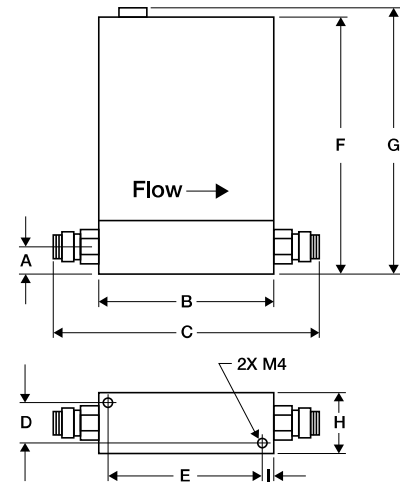

Hitachi Metals, Ltd.

<https://www.hitachi-metals.co.jp/e/>

Headquarters

Advanced Metals Division
Piping Components Business Unit
Global Piping Components Sales Dept.
Shinagawa Season Terrace, 2-70, Konan 1-chome, Minato-ku, Tokyo 108-8224, Japan
Tel +81-3-6774-3530 Fax +81-3-6774-4348

Customer Support

210 Obuke, Asahi-cho, Mie-gun, Mie Pre.510-8102, Japan
Tel +81-59-377-3040 Fax +81-59-377-4575

Fine Flow Service

1920 Zanker Road #10, San Jose, California 95112, U.S.A.
Tel +1-408-467-8900 Fax +1-408-467-8901
E-mail : AeraSales@wardmfg.com

Hitachi Metals (China), Ltd.

<http://www.hitachi-metals.cn/>
Call Center
TEL: + 86-(0)755-8600-6828 ext. 885
+ 86-138-0989-5542
Email: service@hmsz.hitachi-metals.com

Hitachi Metals Europe GmbH

Immermannstrasse 14-16, 40210 Duesseldorf, Germany
Tel +49-211-16009-0 Fax +49-211-16009-29
E-mail : aerasales-europe@hitachi-metals-europe.com



Safety Precaution

Before using any of the products introduced in this catalog, please read the respective user manuals thoroughly.

- Contents of this catalog is as of July 2019.
- The products and their specifications are subject to change without notice. Please check the latest catalog, technical documents or specifications before your final design, procurement or use of the products.
- Aera® are trademarks of Hitachi Metals Ltd..
- Swagelok® and VCR® are trademarks of Swagelok Company Corporation.

Hitachi Metals Ltd. Is not responsible for the following troubles and damages.

- Troubles or damages caused by natural disaster or inevitable accident, caused by mishandling, use or storage in an improper place, use out of the rated specifications and modification, factors contamination and clog due to use of corrosive gas and reactive gas.
- Any trouble or damage that is outside of Hitachi Metals Ltd.'s control has no responsibility (if it does not clarify where responsibility lies, warranty is to be determined whether or not it costs regardless of the warranty period after deliberation).

The above contact numbers are subject to change. If you cannot reach us using those numbers, please try the following: Hitachi Metals, Ltd.
Toll-free 0800-500-5055 (in Japan), Tel.+81-3-6774-3001
All rights reserved.

